

IECC Compliance Guide to Window Selection in Illinois

Designed to Comply with the IECC Requirements for New Single-Family Residential Buildings in Illinois

Code: 2000 International Energy Conservation Code (IECC)

First Edition

How to Use This Guide

This guide is designed to help select windows that will meet the requirements of the IECC in Illinois. Each county is assigned to one of five packages (A through E), which vary according to the different climate zones in Illinois.

Step-by-Step Instructions

1. Use the color-coded map to locate the county in which construction is taking place and find the package (A through E) associated with that county.
2. Use the "Table of IECC Requirements for Window Selection in Illinois" (on the back of this sheet) to find the prescriptive path based upon the package selected in Step 1, above.
3. Construct the home with windows that have area weighted average U-factors less than or equal to the values for the corresponding path and meet the code maximum air leakage requirements.


Example: If you are constructing a home with a window area of 15% in Cook County, found in Package E, you will comply with the IECC window requirements in Illinois if your windows have an area weighted average maximum U-factor of 0.35 and air leakage less than 0.3 cfm/sq.ft.

Obtaining the IECC

The IECC is published by the International Code Council (ICC). For additional details on the IECC or to purchase a copy, contact the ICC or visit its website at www.iccsafe.org.

Limitations

This guide is an energy code (IECC based) window selection compliance aid for Illinois and does not provide a guarantee for meeting the state energy code. The guide has not been customized to reflect any state-specific amendments to the IECC that Illinois may adopt or has adopted. The window requirements in this guide also depend upon the energy performance values of other envelope components in the home, i.e., insulation R-values in ceilings, walls, etc., not identified in this guide. For those values, refer to Tables in Chapter 5 of the IECC. For additional details on Illinois' energy code, contact your local building code official.

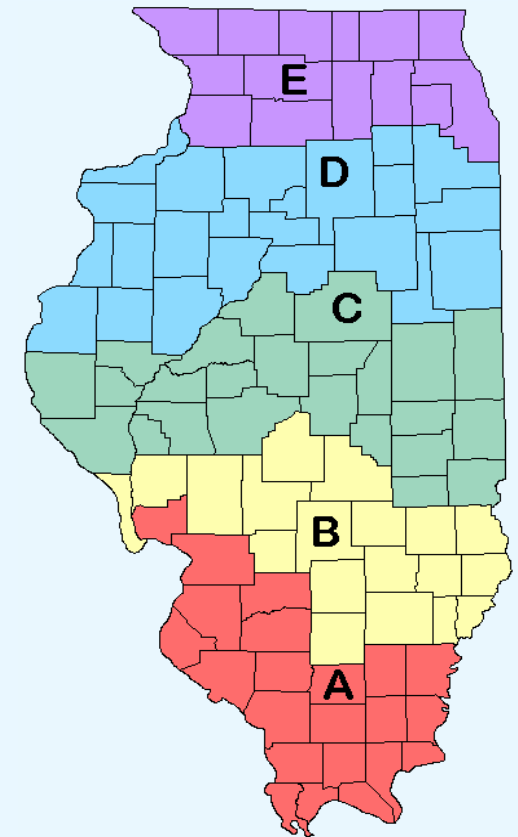

Illinois Counties by Package

A 4,500 to 4,999 HDD			
Alexander	Jackson	Perry	Union
Clinton	Jersey	Pope	Washington
Franklin	Johnson	Pulaski	White
Gallatin	Madison	Randolph	Williamson
Hamilton	Massac	Saline	
Hardin	Monroe	St. Clair	

B 5,000 to 5,499 HDD			
Bond	Edwards	Jefferson	Richland
Calhoun	Effingham	Lawrence	Shelby
Christian	Fayette	Macoupin	Wabash
Clay	Greene	Marion	Wayne
Crawford	Jasper	Montgomery	

C 5,500 to 5,999 HDD			
Adams	Cumberland	Mason	Pike
Brown	De Witt	McLean	Sangamon
Cass	Douglas	Menard	Schuyler
Champaign	Edgar	Morgan	Scott
Clark	Logan	Moultrie	Tazewell
Coles	Macon	Piatt	Vermilion

D 6,000 to 6,499 HDD			
Bureau	Henry	Livingston	Rock Island
Ford	Iroquois	Marshall	Stark
Fulton	Kankakee	McDonough	Warren
Grundy	Kendall	Mercer	Will
Hancock	Knox	Peoria	Woodford
Henderson	La Salle	Putnam	

E 6,500 to 6,999 HDD			
Boone	Du Page	Lee	Whiteside
Carroll	Jo Daviess	Mchenry	Winnebago
Cook	Kane	Ogle	
De Kalb	Lake	Stephenson	

HDD = Heating Degree Days

Table of IECC Requirements for Window Selection in Illinois

Simplified Prescriptive Window Requirements for Compliance with the IECC for New Single-Family Residential Buildings in Illinois

Package ^a	Maximum Window U-Factor ^b
A	0.45
B	0.45
C	0.40
D	0.35
E	0.35

a. This table of prescriptive requirements is applicable to homes in which the ratio of the rough opening of windows to the gross wall area, expressed as a percentage, is 15%. For homes with glazing areas that are greater than 15%, please refer to Tables 502.2.4(4)-(6) in the IECC.

b. U-factors may be determined by calculating an area weighted average U-factor for all windows. For example, Area Weighted Average U-factor equals $((Area1 \times U1) + (Area2 \times U2)) / (Total \ Area)$. The area weighted average must not exceed the maximum values in the selected path.


NOTES:

1. This table of window requirements is based upon the International Energy Conservation Code (IECC) and does not reflect any state-specific amendments to the IECC. The IECC specifies additional requirements for other parts of the building envelope not listed here, such as insulation for walls and ceilings.
2. This table applies to single-family, residential construction.
3. "Window" refers to any translucent or transparent material (i.e., glazing) in exterior openings of buildings, including skylights, glass doors, the glass areas of opaque doors, and glass block, along with the accompanying sashes, frames, etc.
4. Window area % is the ratio of the area of the rough opening of windows to the gross wall area, expressed as a percentage. Up to one percent of total window area may be exempt from the U-factor requirement.
5. U-factor is a number, generally between 0.2 and 1.20, that indicates the rate of heat loss (or gain) through a window. A lower U-factor demonstrates a greater resistance to heat loss and gain, i.e., better insulating value, of the window. This number is important for winter comfort.
6. Window U-factor must be determined from a National Fenestration Rating Council (NFRC) label on the product (see sample label below), or from a limited table of product "default" values in the IECC.
7. The code requires that windows be labeled in a manner to determine that they meet the IECC's air infiltration requirements; specifically, equal to or better than 0.30 cfm per square foot of window area (swinging doors below 0.50 cfm) as determined in accordance with AAMA/WDMA 101/I.S.2 (ASTM E 283).
8. The labeled product U-factor value should also be used in calculation procedures to properly size the home's HVAC equipment. The IECC requires the use of a computational procedure like ACCA Manual J to size equipment. Properly sized equipment will operate more efficiently and effectively and will save money up front because consumers can avoid paying extra for oversized equipment.

Look for the NFRC Label!



The most important value to look for is the U-factor

		World's Best Window Co. Millennium 2000+ Vinyl-Clad Wood Frame Double Glazing • Argon Fill • Low E Product Type: Vertical Slider	
ENERGY PERFORMANCE RATINGS			
U-Factor (U.S./I-P)		Solar Heat Gain Coefficient	
0.35		0.32	
ADDITIONAL PERFORMANCE RATINGS			
Visible Transmittance		Air Leakage (U.S./I-P)	
0.51		0.2	
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. Consult manufacturer's literature for other product performance information. www.nfrc.org</small>			

For more information on energy efficient windows, go to the Efficient Windows Collaborative website at: www.efficientwindows.org

